

## Physical-chemical characterisation of the urban wastewater – case study of the Boumerdes region, North – Algeria

Djalal Ait Baziz<sup>1</sup>, , Abdelhak Maazouzi<sup>1</sup>, Salih Lachache<sup>2</sup>

<sup>1</sup> Tahri Mohamed University, Faculty of Technology, Mechanical Engineering Department, Laboratory of Chemistry and Environmental Sciences, B.P. 417, Independence St., 08000, Kenadsa, Bechar, Algeria

<sup>2</sup> University Center of Nour Bachir El-Bayadh, Institute of Sciences, El Bayadh, Algeria

RECEIVED 31.07.2021

ACCEPTED 08.03.2022

AVAILABLE ONLINE 28.09.2022

**Abstract:** The objective of this study is to assess the physical-chemical quality of urban wastewater from the city of Boumerdès, in northern Algeria with regard to the threshold values for irrigation or their discharge in aquatic ecosystems. Five sampling points were carried out of the study area in April 2017. The results obtained of physical-chemical parameters indicating pollution show that the water course is exposed to pollution mainly of organic origin. It's expressed by a high maximum value according to Algerian and World Health Organisation standards: chemical oxygen demand ( $COD$  886 mg  $O_2 \cdot dm^{-3}$ ), biochemical oxygen demand ( $BOD_5$  490 mg  $O_2 \cdot dm^{-3}$ ), nitrate ( $NO_3^-$  73.09 mg- $dm^{-3}$ ), nitrite ( $NO_2^-$  6 mg- $dm^{-3}$ ), ammonium ( $NH_4^+$  23 mg- $dm^{-3}$ ) and phosphates ( $PO_4^{3-}$  7.3 mg- $dm^{-3}$ ).

The  $COD$  to  $BOD_5$  rate of 1.8, show that the effluents must be treated before being discharged into the receiving environment. However, it is lower than 2, which makes them easily biodegradable and can be treated by a biological system such as a natural lagoon. It shows also a diversified origin of the pollution. It is predominantly domestic origin, it could have an adverse effect on public health, presenting a risk of environmental eutrophication, contamination of soil and water resources.

The physical-chemical characterisation of the urban wastewater shows that they are quite loaded and present a pollution in nitrogenous compounds, a treatment is requested before the direct discharge to the receiving environment or their reuse in the irrigation.

**Keywords:** D>Boumerdes, physical-chemical parameters, pollution, urban wastewater, water quality standards

### INTRODUCTION

Water forms the backbone of the world's economy and it is critical to the development of all spheres of human endeavour [OBI *et al.* 2006]. The scarcity of freshwater resources [FALKENMARK, WISTRAND 1992], due particularly to the uncontrolled increase in the population, constitutes a serious development problem in the arid regions of the world, particularly in developing countries, where water of marginal quality is gradually being used in agriculture [BELHAJ *et al.* 2016]. The global trend towards urbanisation and the population growth of cities, on the one hand, require increasing volumes of water to be extracted and transported [HUNT, WATKISS 2011] for the supply of drinking water, and on the other hand, lead to a significant production of wastewater.

Urban aquatic ecosystems including streams, rivers, lakes, and estuaries have been subjected to increasing anthropogenic stress over the past decades [ADAMS, GREELEY 2000], particularly in regions where wastewater is discharged directly into the natural environment without preliminary treatment [EMMANUEL *et al.* 2009]. Indeed, surface waters often serve as a means for disposing wastes loaded with nutrients and heavy metals [STRECK, RICHTER 1997] from residential areas, industries and manufacturing plants [DYER *et al.* 2003].

In Algeria, the Tatarag River is the principal watercourse which pass through the city of Boumerdes and discharges into the Mediterranean Sea [AMIRI *et al.* 2017]. With the exception of urban effluents collected and treated by the wastewater treatment of Boumerdes plant (ONA), a daily volume of 15,000  $m^3 \cdot d^{-1}$ , all

other liquid discharges of domestic origin generated by the city of Boumerdes released, without preliminary treatment, directly into this river. The continual discharge of chemical substances in aquatic ecosystems can bring about changes in the structure and functioning of the biotic community, i.e. on biotic integrity [KARR 1991]. As a function of their bioavailability, the pollutants present in effluents cause a large number of harmful effects on the biodiversity of aquatic environments [FORBES 1994]. The physical-chemical aggression sustained by surface waters due to contact with pollutants contained in liquid discharges lead to a loss of aquatic biodiversity in many cases [EMMANUEL *et al.* 2009]. This study aims to assess the physicochemical quality of urban wastewater from the city of Boumerdes, in northern Algeria with regard to the threshold values for irrigation or their discharge in aquatic ecosystems.

## MATERIALS AND METHODS

### STUDY AREA

Boumerdes (36°46'00' N, 3°28'00' E) is a coastal city in the center of Algeria, located in Lower Kabylia (Fig. 1). It is located 45 km east of the capital Algiers and it extends over an area of about 2040 ha and contains a population of about 41,685 inhabitants in 2008 with a growth rate of 2.2% [City population 2008]. The wastewaters of Boumerdes city are discharged directly into the sea.

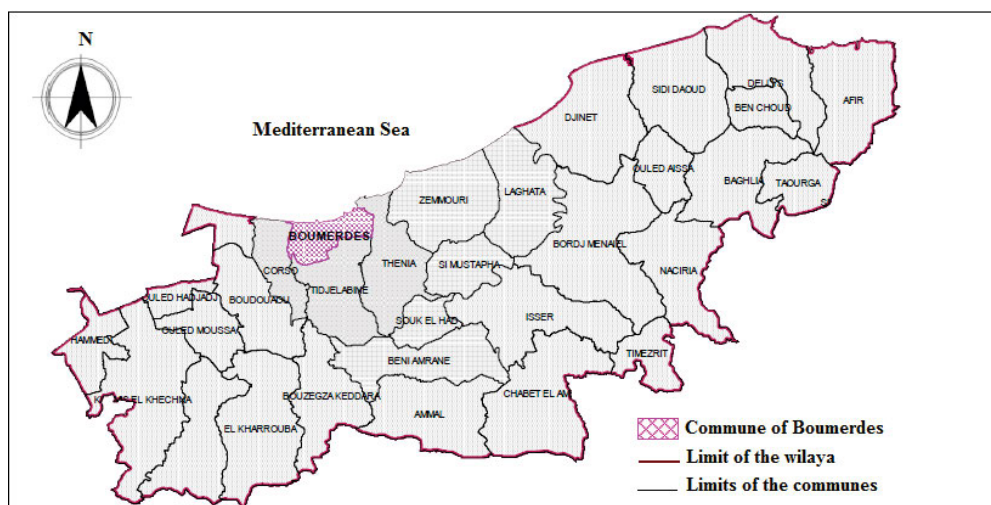


Fig. 1. Geographic location of the commune of Boumerdes; source: own elaboration based on ABH [2010], and AMIRI [2012]

The climate in Boumerdes is Mediterranean, cold and wet in winter, hot and dry in summer. The annual rainfall varies between 500 and 1,300 mm.

### SAMPLING

To study the water quality of the study area, five sampling points were selected and noted (S1–S5) according to the light of a preliminary study of the physical-chemical parameters, the frequency of use by local residents, and according to the direction and the accessibility of the water course (Fig. 2). The sampling and collection methods were carried out according to the recommendations. In April 2017, the five samples of 1.5 dm<sup>3</sup>

each in the polyethylene bottles were taken to the laboratory for physical-chemical analyses. The parameters (temperature, conductivity and pH) were measured on site using a multi-parameter (Consort 861).

### PHYSICAL-CHEMICAL PARAMETERS MEASURED

**The potential of hydrogen (pH)** is a parameter that measures the acidity or basicity of a solution. This parameter conditions a large number of physical-chemical balances and depends on multiple factors, including the temperature and the origin of the water. According to BLINDA [2007], a pH between 5 and 9 allows a normal development of fauna and flora.

**Electrical conductivity (EC)** allows to appreciate the quantity of salts dissolved in water, so it reflects the degree of global mineralisation [BELGHYTI *et al.* 2009].

**Biochemical oxygen demand (BOD<sub>5</sub>)** is the quantity of oxygen required by aerobic micro-organisms in the water to oxidise organic matter dissolved or suspended in the water. It is therefore a potential consumption of oxygen by biological way.

**The chemical oxygen demand (COD)** indicates the amount of oxygen needed to oxidise organic matters, this parameter is an indicator of the amount of chemically oxidisable organic substances present in the water [BLIEFERT, PERRAUD 2001]. The increase in its concentration could be attributed to an increase in

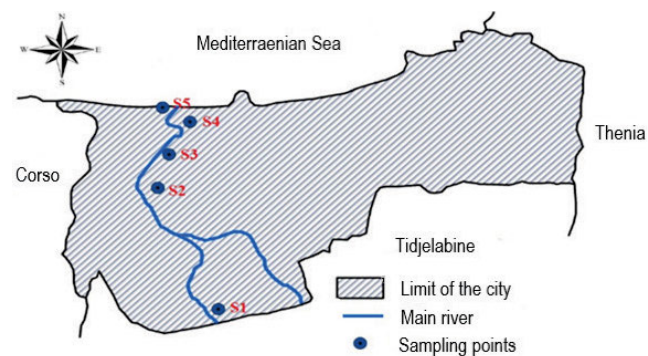


Fig. 2. Sampling points (S1–S5) – urban wastewater of Boumerdes city; source: own elaboration

organic and inorganic substances in the receiving environment [IGBINOSA, OKOH 2009].

**Nitrates** ( $\text{NO}_3^-$ ) represent the most oxygenated form of nitrogen, it is a very soluble form and its presence is related to the intensive use of chemical fertilisers. In this form, nitrogen is a nutritive salt that can be used by the majority of plants [TOUATI *et al.* 2018].

**Nitrites** ( $\text{NO}_2^-$ ) are the least stable form in the nitrogen cycle, they result from the reduction of ammonium. Their origins are related to agriculture or to urban and industrial discharges [TOUATI *et al.* 2018].

**Ammonium** ( $\text{NH}_4^+$ ): ammonification reactions can transform organic nitrogen into ammonium, the oxygen demand by this reduced form of nitrogen is very high however this compound is odorous it is the origin of bad smells [DUSSART 1966].

**Phosphates** ( $\text{PO}_4^{3-}$ ) can be from organic or mineral origin. Most often their presence in natural waters is the result of their use in agriculture as chemical fertilisers or pesticides [TOUATI *et al.* 2018].

The physical-chemical analysis consists in the determination of the principal parameters indicators of pollution such as *COD*, *BOD*<sub>5</sub>, total Kjeldahl nitrogen (TKN),  $\text{NH}_4^+$ ,  $\text{NO}_3^-$ ,  $\text{NO}_2^-$  and  $\text{PO}_4^{3-}$ . The threshold values recommended by national and international guidelines for the selected parameters are presented in Table 1.

**Table 1.** Threshold values recommended for the selected parameters

Parameter	Unit	Threshold values acc. to		
		Décret exécutif n° 06-141	OMS [1989]	Commission Directive 98/15/EEC, Arrêté du 2 février 1998
Temperature	°C	30	30	–
pH	–	6.5–8.5	6.5–8.5	–
EC	dS·m <sup>-1</sup>	–	<–3	–
<i>BOD</i> <sub>5</sub>	mg·dm <sup>-3</sup>	35	<30	25
<i>COD</i>		120	<40	125
Nitrates		–	<50	10
Nitrites		–	<1	–
Ammonium		–	<2	–
Phosphates		2	<0.94	1

Explanations: *EC* = electrical conductivity, *BOD*<sub>5</sub> = biochemical oxygen demand, *COD* = chemical oxygen demand.

Source: own elaboration based on literature.

These parameters were monitored in the different sampling points (five sampling points and the mixture sample). After having collected and preserved the samples according to the conditions required for wastewater, the analyses were carried out according to the recommended protocols.

## METHODS OF DETERMINATION OF THE SELECTED PHYSICAL-CHEMICAL PARAMETERS

The physical parameters measured are *T*, pH and *EC*. The chemical parameters determined are: *COD*, *BOD*<sub>5</sub>, the content of  $\text{NO}_3^-$ ,  $\text{NO}_2^-$ ,  $\text{NH}_4^+$  and  $\text{PO}_4^{3-}$ .


According to standard analysis techniques. The determination methods [RODIER *et al.* 1996] used are as follows:

- potentiometric method (Consort 861) for pH, temperature and *EC*;
- colorimetric method for the phosphate content (multi-parameter HANNA model C200);
- potentiometric method (HI 121) using a specific electrode for nitrates.

## RESULTS AND DISCUSSION

### POTENTIAL OF HYDROGEN (pH) AND TEMPERATURE (T)

The temperature (*T*) values in the city of Boumerdes vary between 18.0 and 21.9°C. The increase in temperature would promote the phenomenon of self-purification and increase the rate of sedimentation of suspended matter [MOUSSA MOUMOUNI DJERMAKOYE 2005]. The values pH oscillate between 7.1 and 8.3 (Fig. 3) which means that the environment is slightly basic.

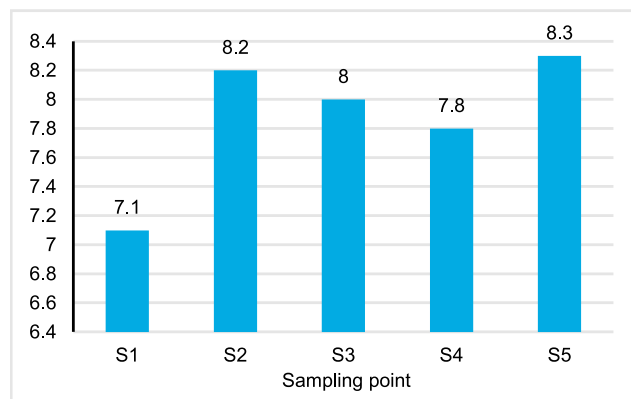

**Fig. 3.** Spatial evolution of pH; source: own study

### ELECTRICAL CONDUCTIVITY

The maximum value of *EC* is observed at point S2 with a value of 4.9 dS·m<sup>-1</sup> (Fig. 4), the point S2 and S4 indicate a high mineralisation [RODIER *et al.* 2009] that exceeds the standard of water reused in agriculture (3.0 dS·m<sup>-1</sup>) [OMS 1989].

### BIOCHEMICAL OXYGEN DEMAND (*BOD*<sub>5</sub>)

The maximum value of *BOD*<sub>5</sub> was observed at point S5 with 490 mg O<sub>2</sub>·dm<sup>-3</sup> (Fig. 5), noticing that all the sampling points are higher than the Algerian standards of 35 mg O<sub>2</sub>·dm<sup>-3</sup> [Décret exécutif n° 06-141] or 30 mg O<sub>2</sub>·dm<sup>-3</sup> [OMS 1989] for irrigation waters or direct discharges. The increase of this parameter is related to the load of biodegradable organic matters. According to ASIA and AKPORHONOR [2007], if the values of *BOD*<sub>5</sub> and *COD* are

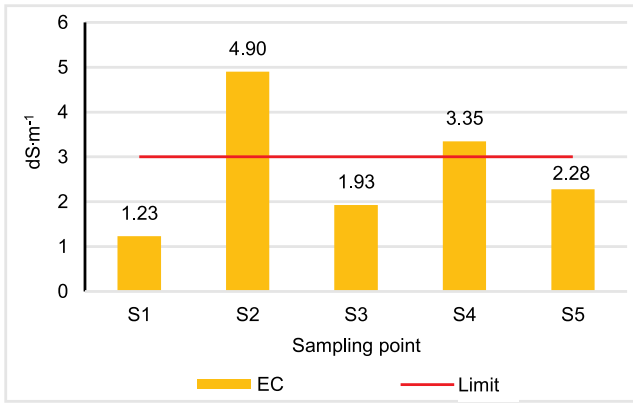


Fig. 4. Spatial evolution of electrical conductivity (EC); source: own study

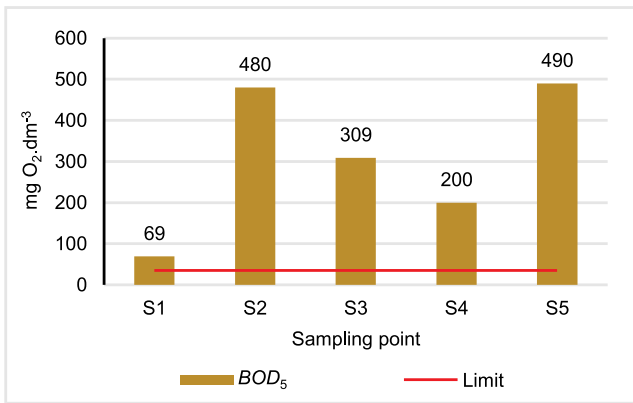


Fig. 5. Spatial evolution of biochemical oxygen demand (BOD<sub>5</sub>); source: own study

high than threshold values, it means that the wastewater has a high pollution potential and should be treated before discharge to the environment.

### CHEMICAL OXYGEN DEMAND (COD)

The minimum value of COD is 189 mg O<sub>2</sub>·dm<sup>-3</sup> is recorded at point S1; the maximum value of 886 mg O<sub>2</sub>·dm<sup>-3</sup> is observed at point S5 (Fig. 6), these values are high compared to the limit values of irrigation water [OMS 1989] for discharge to a receiving environment fixed at a 120 mg O<sub>2</sub>·dm<sup>-3</sup> [Décret exécutif n° 06-141]. These values are close to those of ONA [2010] declared by AMIRI [2012].

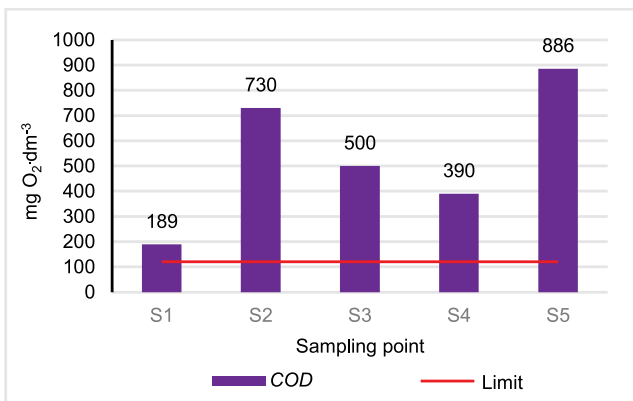


Fig. 6. Spatial evolution of chemical oxygen demand (COD); source: own study

### NITRATES

The values of NO<sub>3</sub><sup>-</sup> recorded oscillate between 20 and 73.09 mg·dm<sup>-3</sup> (Fig. 7), according to the international standard for water used for irrigation only point S1 is in conformity [OMS 1989] (<50 mg·dm<sup>-3</sup>). These values are in concordance with those of MOUNI *et al.* [2009] for the waters of the Soummam River in Algeria.

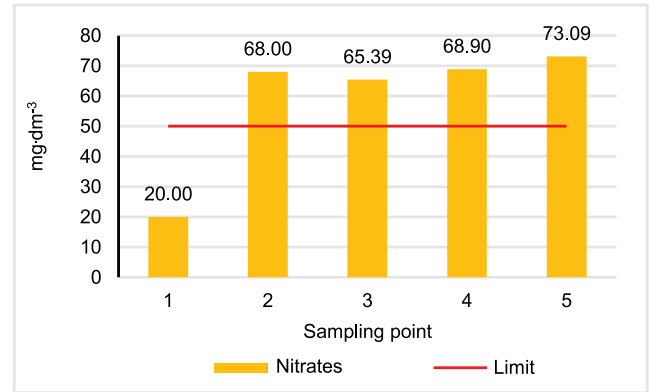


Fig. 7. Spatial evolution of nitrates (NO<sub>3</sub><sup>-</sup>); source: own study

### NITRITES

In the studied waters this element is characterised by high values with a maximum of 6 mg·dm<sup>-3</sup> at the location S4, probably due to domestic discharges of the municipality which are discharged into the river, as well as the phytosanitary products of fertilisers used in agriculture. The minimum value is recorded at point S1 with a value of 0.4 mg·dm<sup>-3</sup> (Fig. 8). According to OMS [1989; 2001], the concentrations obtained for nitrites in raw wastewater during the monitoring are higher than the international standards for water intended for irrigation (1 mg·dm<sup>-3</sup>) or the one fixed for surface water, except for point S1. These results are in agreement with those of DERRADJI *et al.* [2007] for surface waters in the north-east of Algeria, MOUNI *et al.* [2009] for the waters of the Soummam River in Algeria and AHMED BAIG *et al.* [2009] for the surface waters of the city of Jamshoro in Pakistan.


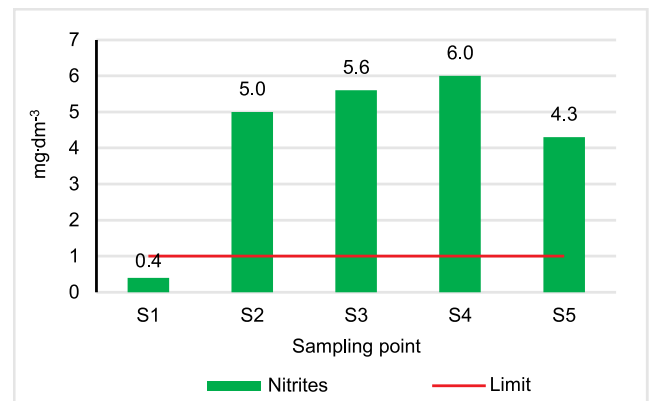


Fig. 8. Spatial evolution of nitrites (NO<sub>2</sub><sup>-</sup>); source: own study

### AMMONIUM

Theoretically, ammonia nitrogen exists in aqueous solution as either the ammonium ion or ammonia, depending on the pH of the solution, in accordance with the following equilibrium reaction acc. to Metcalf and Eddy Inc. [1991]:



At pH levels above 7 (our case), equilibrium is displaced to the left. The spatial evolution of this parameter indicates a contamination since the values are higher than the standards of irrigation waters fixed at  $<-2 \text{ mg}\cdot\text{dm}^{-3}$  [OMS 1989]. The maximum value is observed at point S5 with  $23 \text{ mg}\cdot\text{dm}^{-3}$ , the minimum is observed at point S1, with a value of  $11 \text{ mg}\cdot\text{dm}^{-3}$  (Fig. 9).

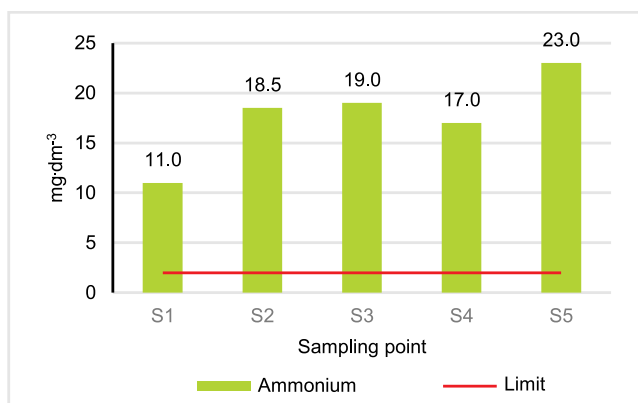


Fig. 9. Spatial evolution of ammonium ( $\text{NH}_4^+$ ); source: own study

### PHOSPHATES

The measured values of  $\text{PO}_4^{3-}$  vary between  $1.35$  and  $7.3 \text{ mg}\cdot\text{dm}^{-3}$  (Fig. 10), detergent discharges are probably the origin of 50–70% of the phosphorus. Detergents, and in particular laundry detergents, use polyphosphates to fight against water hardness, to help emulsify greases and to keep the dirt suspended. Polyphosphates are then released during rinsing, they have a tendency to hydrolyse into phosphates in wastewater [REJSEK 2002]. Phosphates also participate in the first line of the eutrophication process, a phenomenon with environmental consequences (algal growth) and health consequences (release of algal toxins) [FESTY *et al.* 2003], these values exceed without

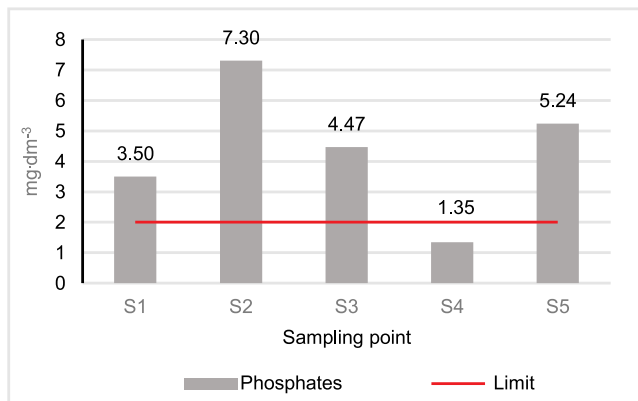


Fig. 10. Spatial evolution of phosphates ( $\text{PO}_4^{3-}$ ); source: own study

exception the limit of irrigation water set at ( $<0.94 \text{ mg}\cdot\text{dm}^{-3}$ ) [OMS 1989] and the limit of discharge into a receiving environment set at  $2 \text{ mg}\cdot\text{dm}^{-3}$  [Décret exécutif n° 06-141] except for sampling point S4, according to MAAZOUZI *et al.* [2011]. It is a eutrophic environment.

### BIODEGRADABILITY

The biodegradability of organic substances occurs as a function of the speed and completeness of its biodegradability by micro-organisms [SPONZA 2003]. Therefore,  $BOD_5$  to  $COD$  or  $COD$  to  $BOD_5$  and  $COD$  to total organic carbon ( $TOC$ ) ratios could be used to analyse the difficulty or ease of degradation of organic substances [EMMANUEL *et al.* 2004]. In this study, precise knowledge of the organic carbon of the wastewater samples from the city of Boumerdes, which is necessary in order to analyse biodegradability by using the ratios of global parameters, was not completed, because the  $TOC$  was not taken into account. However, the data obtained from the  $COD$  to  $BOD_5$  ratio shows a varied origin of pollution in the study area. It is predominantly domestic (ratio between 2 and 3), at the level of point S1. However, at the other locations (S2, S3, S4 and S5), it is of agri-food origin (report is between 1.5 and 2.0 which means a better biodegradability (Fig. 2). We can also conclude the absence of industrial discharge in the urban sewerage system since ( $COD: BOD_5 < 3$ ) [Degremont SA 2005; RODRIGUES *et al.* 2008]. These results are in agreement with those of AMIRI *et al.* [2017].

### CLASSIFICATION OF WATER QUALITY

The organic pollution according to nitrates, nitrites at the sampling point S1 of the study area is in compliance with the standard of water reused for irrigation. Concerning the other points (S2, S3, S4, and S5), they present a pollution classified as acceptable, this pollution results from the domestic discharges of the region which are directly discharged into the river. However, all five samples show ammonia contamination (Tab. 2) due to domestic discharges from the city, runoff water and probably the leaching of plots next the watercourses which carry nitrogen to it

Table 2. Surface water quality classification acc. to TOUATI *et al.* [2018]

Chemical compound	Specification	Class			
		excellent	good	acceptable	bad
Nitrites	value <sup>1)</sup>	<0.1	0.1–0.5	0.5–8	>8
	sampling point	–	S1	S2, S3, S4, S5	–
Nitrates	value	<5	5–50	50–80	>80
	sampling point	–	S1	S2, S3, S4, S5	–
Ammonium	value	<0.1	0.1–0.5	0.5–2	2–8
	sampling point	–	–	–	S1, S2, S3, S4, S5

<sup>1)</sup> Values of each parameter are expressed in  $\text{mg}\cdot\text{dm}^{-3}$ . Source: own study.

[BREMONT, VUICHARD 1973]. These results are in line with those of MEGATELI [2014], on the Beni Aza waters (Blida, Algeria) and those of TOUATI *et al.* [2018] on Guelma groundwater.

### WATER QUALITY ACCORDING TO: $BOD_5$ , $COD$ AND PHOSPHATE

The waters of Tatarag River are classified as out of class for the various parameters  $BOD_5$ ,  $COD$  and phosphate according to Table 3, all sampling points record a very high pollution probably caused by domestic discharges generated by the study town, random discharges and the use of fertilisers and pesticides in agriculture [BREMONT, VUICHARD 1973]. These results are in line with those of MEGATELI [2014], on the Beni Aza waters (Blida, Algeria).

**Table 3.** Water quality status for the study area acc. to ABH [2009] and TOUATI *et al.* [2018]

Parameter	Specification	Class				
		good no pollution	quite good moderate water pollution	poor net water pollution	bad significant water pollution	out of class very high water pollution
$BOD_5$	value (mg $O_2 \cdot dm^{-3}$ )	<3	3–5	5–10	10–25	>25
	sampling point	–	–	–	–	S1, S2, S3, S4, S5
$COD$	value (mg $O_2 \cdot dm^{-3}$ )	<20	20–25	25–40	40–80	>80
	sampling point	–	–	–	–	S1, S2, S3, S4, S5
Phosphate	value (mg $dm^{-3}$ )	<0.1	0.1–0.3	0.3–0.5	0.5–3	>3
	sampling point	–	–	–	S4	S1, S2, S3, S5

Source: own study.

### CONCLUSIONS

This research has approached the problem of wastewater treatment in the area of Boumerdes, whose water needs are growing, facing a degradation of this resource related to environmental pollution. The study has allowed first to characterise the polluting load of wastewater from the city of Boumerdes which is of bad quality. The waters of Tatarag River present a pollution in nitrogenous compounds classified as Acceptable and exceeding by places the tolerated standard except for ammonium all the sampling points present a bad pollution.

The  $COD$  to  $BOD_5$  ratio, reflecting the biodegradability shows a diversified origin of the pollution in the study area. It is predominantly domestic in the majority of the analysed points, most of them present a net pollution in terms of  $BOD_5$ ,  $COD$  and phosphates.

The wastewater studied according to the physical-chemical characterisation (spatial evolution) of the various parameters indicators of pollution proves to be quite charged, it can be classified as highly polluted urban wastewater, a treatment is highly requested before their direct discharge to the receiving environment or their reuse in agriculture.

### REFERENCES

- ABH 2010. Guide de l'Algérie, agence de bassin hydrographique Algérois-Hodna-Soummam [Guide of Algeria, Algerian-Hodna-Soummam River Basin Agency]. Agence des bassins hydrographiques pp. 26.
- ADAMS S.M., GREELEY M.S. 2000. Ecotoxicological indicators of water quality using multi-response indicators to assess the health of aquatic ecosystems. *Water, Air and Soil Pollution*. Vol. 123(1–4) p. 103–115. DOI 10.1023/A:1005217622959.
- AHMED BAIG J., KAZI T.G., ARAIN M.B., AFRIDI H.I., KANDHRO G.A., SARFRAZ R.A., JAMAL M.K., SHAH A.Q. 2009. Evaluation of arsenic and other physical-chemical parameters of surface and ground water of Jamshoro (Pakistan). *Journal of Hazardous Materials*. Vol. 166(2–3) p. 662–669. DOI 10.1016/j.jhazmat.2008.11.069.
- AMIRI K. 2012. Evaluation du fonctionnement de trois stations d'épuration à boues activées de la wilaya de Boumerdes dans le cadre d'une gestion intégrée des ressources en eau [Evaluation of the operation of three activated sludge treatment plants in the wilaya of Boumerdes within the framework of integrated water resources management]. El Harrach, Alger. National Agronomy Superior School pp. 47.
- AMIRI K., BEKKARI N., DEBBAKH A., BENMALEK A., BOUCHAHM N. 2017. Caractérisation des eaux usées des rejets domestiques de la ville de Touggourt (Algérie) [Characterisation of wastewater from domestic discharges in the city of Touggourt (Algeria)]. *Algerian Journal of Arid Regions (JARA)*. Vol. 14 p. 104–109.
- Arrêté du 2 février 1998 relatif aux prélèvements et à la consommation d'eau ainsi qu'aux émissions de toute nature des installations classées pour la protection de l'environnement soumises à autorisation [Order of February 2, 1998 relating to water sampling and consumption as well as to emissions of any kind from installations classified for environmental protection subject to authorisation]. Ministry of Land Management and Environment. Official Journal of France. No. 52, 3247.
- ASIA I.O., AKPORHONOR E.E. 2007. Characterisation and physical-chemical treatment of wastewater from rubber processing factory. *International Journal of Physical Sciences*. Vol. 2(3) p. 061–067.
- BELGHYTI D., EL GUAMRI Y., ZITTI G., OUAHIDI M.Y. L., JOTI M.Y.B., HARCHRASS A., AMGHAR H., BOUCHOUATA O., EL KHARRIM K., BOUNOUIRA H. 2009. Caractérisation physico-chimique des eaux usées d'abattoir en vue œuvre d'un traitement adéquat : cas de Kénitra au Maroc [Physical-chemical characterisation of abattoir wastewater for adequate treatment: The case of Kenitra in Morocco]. *Afrique Science*. Vol. 5(2) p. 199–216. DOI 10.4314/afsci.v5i2.61730.
- BELHAJ D., JERBI B., MEDHIOUB M., ZHOU J., KALLEL M., AYADI H. 2016. Impact of treated urban wastewater for reuse in agriculture on crop response and soil ecotoxicity. *Environmental Science and Pollution Research*. Vol. 23(16) p. 15877–15887. DOI 10.1007/s11356-015-5672-3.

- BLIEFERT C., PERRAUD R. 2001. Chimie de l'environnement : Air, eau, sols, déchets [Environmental chemistry: Air, water, soil, waste]. Brussels. De Boeck University. ISBN 2744500860 pp. 477.
- BLINDA M. 2007. Pollution tellurique du littoral nord-ouest du Maroc entre Tanger et Tétouan : caractérisation, impact sur l'environnement et proposition de solutions [Land pollution of the northwest coastline of Morocco between Tangier and Tetouan: Characterisation, impact on the environment and proposed solutions]. PhD Thesis. Rabat. University of Mohammed V pp. 75.
- BREMOND R., VUICHARD R. 1973. Paramètres de la qualité des eaux [Water quality parameters]. Paris. French Documentation pp. 178.
- City population 2008. Boumerdés [online]. [Access 15.06.2021]. Available at: [https://www.citypopulation.de/en/algeria/boumerdes/3501\\_\\_boumerd%C3%A8s/](https://www.citypopulation.de/en/algeria/boumerdes/3501__boumerd%C3%A8s/)
- Commission Directive 98/15/EEC amending Council Directive 91/271/EEC: Urban wastewater treatment. OJ L 6, 7.3.
- Décret exécutif n°06-141 du 20 Rabie El Aouel 1427, correspondant au 19 avril 2006. Normes Algériennes pour les rejets industriels [Executive order n°06-141 of 20 Rabie El Aouel 1427, corresponding to April 19, 2006. Algerian standards for industrial discharges. Journal Officiel de la République Algérienne Démocratique et Populaire. No. 26 p. 4–9.
- Degrémont SA 2005. Memento technique de l'eau [Technical manual for water]. 10th ed. Rueil-Malmaison. ISBN 978-2-7430-0717-1 pp. 1718.
- DERRADJI F., BOUSNOUBRA H., KHERICI N., ROMEO M., CARUBA R. 2007. Impact de la pollution organique sur la qualité des eaux superficielles dans le nord-est algérien [Impact of organic pollution on surface water quality in northeastern Algeria]. Revue Sécheresse. Vol. 18 p. 23–27.
- DUSSART B. 1966. Limnologie : l'étude des eaux continentales. Édition géologique écologique aménagement [Limnology: The study of continental waters. Ecological geological editing]. Paris. Gauthier-Villars & Cie pp. 704. DOI 10.1002/iroh.19680530431.
- DYER S.D., PENG C., MCAVOY D.C., FENDINGER N.J., MASSCHELEYN P., CASTILLO L.V., LIM J.M.U. 2003. The influence of untreated wastewater to aquatic communities in the Balatium River, the Philippines. Chemosphere. Vol. 52 p. 43–53. DOI 10.1016/S0045-6535(03)00269-8.
- EMMANUEL E., BALTHAZARD-ACCOU K., JOSEPH O. 2009. Impact of urban wastewater on the biodiversity of aquatic ecosystems. In: Environmental management, sustainable development and human health. Eds. E. Laboy, A. Abdelhadi, M. Goosen, F. Schaffner. London. Taylor and Francis p. 399–424. DOI 10.1201/9780203881255.
- EMMANUEL E., KECK G., BLANCHARD J.M., VERMANDE P., PERRODIN Y. 2004. Toxicological effects of disinfections using sodium hypochlorite on aquatic organisms and its contribution to AOX formation in hospital wastewater. Environment International. Vol. 30(7) p. 891–900. DOI 10.1016/j.envint.2004.02.004.
- FALKENMARK M., WISTRAND C. 1992. Population and water resources: A delicate balance. Population Bulletin. Vol. 47(3) p. 1–36.
- FESTY B., HARTAMANN P., LEDRANS M., LEVALLOIS P., PAYMENT P., TRICARD D. 2003. Qualité de l'eau. En : Environnement et santé publique – Fondements et pratiques [Water quality. In: Environment and public health – Foundations and practices]. Eds. M. Gérin, P. Gosselin, S. Cordier, C. Viau, P. Quénel, É. Dewailly. Paris. Tec & Doc, Acton Vale p. 333–368.
- FORBES V.E., FORBES T.L. 1994. Ecotoxicology in theory and practice. New York. Chapman et Hall. ISBN 978-0-412-43530-0 pp. 220.
- HUNT A., WATKISS P. 2011. Climate change impacts and adaptation in cities: A review of the literature. Climatic Change. Vol. 104 p. 13–49. DOI 10.1007/s10584-010-9975-6.
- IGBINOSA E.O., OKOH A.I. 2009. Impact of discharge wastewater effluents on the physico-chemical qualities of a receiving watershed in a typical rural community. International Journal of Environmental Science and Technology. Vol. 6(2) p. 175–182.
- KARR J.R. 1991. Biological integrity: A long-neglected aspect of water resource management. Ecological Applications. Vol. 1(1) p. 66–84. DOI 10.2307/1941848.
- MAAZOUI A., KETTAB A., BADRI A., ZAHRAOUI B., KABOUR A., CHEBBAH L. 2011. Contribution to the study of the effect of urban wastewater on the degradation of ground water quality and to the treatment by filtration on dune sand of the city of Bechar (Algeria). Desalination and Water Treatment. Vol. 30(1–3) p. 58–68. DOI 10.5004/dwt.2011.1637.
- MEGATELI S. 2014. Impact des rejets des eaux usées sur la qualité physico-chimique et bactériologique de l'oued Beni Aza (Blida, Algérie) [Impact of wastewater discharges on the physical-chemical and bacteriological quality of the Beni Aza River (Blida, Algeria)]. Lebanese Science Journal. Vol. 15. No. 2 p. 39–51.
- Metcalf and Eddy Inc. 1991. Wastewater engineering: Treatment, disposal, reuse. 3rd ed. New York. McGraw-Hill. ISBN 0070416907 pp. 1334.
- MOUNI L., MERABET D., ARKOUB H., MOUSSACE K. 2009. Étude et caractérisation physico-chimique des eaux de l'oued Soummam (Algérie) [Physical-chemical study and characterisation of the Soummam River waters (Algeria)]. Revue Sécheresse. Vol. 20 p. 360–366.
- MOUSSA MOUMOUNI DJERMAKOYE H. 2005. Les eaux résiduelles des tanneries et des teintureries. Caractérisation physico-chimiques, bactériologiques et impact sur les eaux de surfaces et les souterraines [Wastewater from tanneries and dyeing factories. Physical-chemical and bacteriological characterisation and impact on surface and underground waters]. PhD Thesis. University of Bamako pp. 119.
- OBI C.L., ONABOLU B., MOMBA M.N.B., IGUNBOR J.O., RAMALIVAHNA J., BESSONG P.O., VAN RENSBERG E.J., LUKOTO M., GREEN E., MULAUDZI T.B. 2006. The interesting cross-paths of HIV/AIDS and water in Southern Africa with special reference to South Africa. Water South Africa. Vol. 32(3) p. 323–343. DOI 10.4314/wsa.v32i3.5277.
- OMS 1989. L'utilisation des eaux usées en agriculture et en aquaculture: recommandation avisées sanitaires [Wastewater use in agriculture and aquaculture: sanitary recommendations]. Genève. Organisation Mondiale de la Santé. ISBN 9242207780 pp. 82.
- OMS 2001. Guidelines for drinking-water quality. Vol. 1. Recommendations. 3rd ed. Geneva. World Health Organization. ISBN 19789241548151 pp. 183.
- ONA 2010. Office national d'assainissement pp. 66 [cited by Amiri K. [2012]].
- REJSEK F. 2002. Analyse des eaux. Aspects réglementaires et techniques [Water analysis. Technical and legal aspects]. Bordeaux. Canopé – CRDP de Bordeaux p. 165–239.
- RODIER J., BAZIN C., BROUTIN J.P., CHAMBON P., CHAMPSAUR H., RODI L. 1996. L'analyse de l'eau. Eaux naturelles, eaux résiduelles, eaux de mer [Water analysis. Natural water, waste water, sea water]. 8th ed. Paris. Dunod. ISBN 978-2-10-002416-2 pp. 1384.
- RODIER J., LEGUBE B., MERLET N., BRUNET R. 2009. L'analyse de l'eau, eaux naturelles, eaux résiduelles, eau de mer [Water analysis, natural water, waste water, sea water]. 9th ed. Paris. Dunod. ISBN 2100072463 pp. 1600.

- RODRIGUES A.C., BOROSKI M., SHIMADA N.S., GARCIA J.C., NOZAKI J., HIOKA N. 2008. Treatment of paper pulp and paper mill wastewater by coagulation-flocculation followed by heterogeneous photocatalysis. *Journal of Photochemistry and Photobiology A: Chemistry*. Vol. 194 p. 1–10. DOI [10.1016/j.jphotochem.2007.07.007](https://doi.org/10.1016/j.jphotochem.2007.07.007).
- SPONZA D.T. 2003. Application of toxicity tests into discharges of the pulp-paper industry in Turkey. *Ecotoxicology and Environmental Safety*. Vol. 54 p. 74–86. DOI [10.1016/S0147-6513\(02\)00024-6](https://doi.org/10.1016/S0147-6513(02)00024-6).
- STRECK T., RICHTER J. 1997. Heavy metal displacement in a sandy soil at the field scale: I. Measurements and parametrization of sorption. *Journal of Environmental Quality*. Vol. 26 p. 49–56. DOI [10.2134/jeq1997.00472425002600010008x](https://doi.org/10.2134/jeq1997.00472425002600010008x).
- TOUATI M., BENHAMZA M., BOUHAFS F. 2018. Impact of agricultural pollution on the quality of groundwater in the Guelma-Boucheougouf irrigated area (Northeastern Algeria). *Revue des Sciences et de la Technologie. Synthèse*. Vol. 37 p. 103–112.