





Natural coagulation as an alternative to raw water treatment

Angel Villabona-Ortiz¹⁾ , Candelaria Tejada-Tovar¹⁾ , Rodrigo Ortega-Toro²⁾  ,
Natalia Licona Dager¹⁾, Marta Millan Anibal¹⁾

¹⁾ Universidad de Cartagena, Faculty of Engineering, Department of Chemical Engineering, Cartagena de Indias, Colombia

²⁾ Universidad de Cartagena, Faculty of Engineering, Department of Food Engineering,
Avenida Del Consulado 48-152, Cartagena 130014, Colombia

RECEIVED 19.03.2021

ACCEPTED 26.04.2022

AVAILABLE ONLINE 10.02.2023

Abstract: The availability of drinking water is one of the several problems humans face, considering that its availability is reduced to 0.80% of the existing fresh water. Then, coagulation-flocculation is a stage of this treatment. It is a process that agglomerates the suspended particles in a larger (floc) that could be separated by sedimentation and filtration processes to make the water drinkable. So, this work aimed to evaluate the effect of the dose of coagulant of yam starch (*Dioscorea rotundata*) and the speed of agitation in the turbid water treatment process. For which the yam starch was extracted by implementing two methods which were NaOH and H₂O, using centrifugation at 1500 rpm for 10 min, and adjusting the pH with HCl and NaOH 0.20 M, for later determining the effect of agitation speed (rpm) and coagulant concentration (ppm) on the percentage of turbidity removal, pH, and colour, to be compared with a synthetic coagulant. A yield of 42.60% was found in the wet base. The natural coagulants extracted with NaOH presented better turbidity removal, with a percentage of 92.48% at an agitation speed of 40 rpm and a concentration of 250 ppm. It can be concluded that natural yam coagulant can be recommended for use in the coagulation stage in the raw water treatment process for subsequent conversion to drinking water.

Keywords: agitation speed, coagulant concentration, flocculation, turbid waters, yam

INTRODUCTION

One of the great problems faced by the world is the availability of fresh water, since this is vital for the survival of living beings, this because on the planet there is a limitation of the availability of 0.80% of the existing fresh water. However, the remaining 3% of surface water is not always suitable for human consumption, and it is necessary to remove impurities in order to adapt it to the potability standards [FUENTES MOLINA *et al.* 2016]. Wastewater treatment is a multi-stage process to restore water quality, where organic matter, solids, minerals, nutrients, disease causing organisms or other contaminants are reduced or removed from the wastewater.

Coagulation-flocculation is a stage of this treatment, it is a process that agglomerates the suspended particles in a larger (floc) that could be separated by sedimentation and filtration processes [KAAVESSINA *et al.* 2017]. The chemical coagulation-

flocculation process consist in the elimination of suspended particles in the surface of water, with a size average of 5 to 200 nm, and it's determined by physicochemical parameters like ionic strength, point zero charge, pH, temperature, type and dose of coagulant material, type of distribution, concentration, type of pollutant and properties of organic materials and colloidal particles in suspension [SOHRABI *et al.* 2018]. Conventionally, in the process of coagulation-flocculation, polymeric flocculants and inorganic coagulating agents have been used extensively for the elimination of turbidity, dissolved and suspended solids, decrease in chemical oxygen demand in clarification and sedimentation processes [TEH *et al.* 2016]. These flocculants agents generally consist of metallic salts of synthetic origin, which affect the bodies of water if they are available without prior treatment, since their low stability and biodegradability are low [WAN KAMAR *et al.* 2015]. Among the most used polymers are polyacrylamide, polyacrylic acid and various cationic polymers. However, their

cost is high, they have low biodegradability in soil and water, and residual monomers have a high level of toxicity [TRUJILLO *et al.* 2014]. In contrast, natural polyelectrolytes are inexpensive, have low toxicity and good biodegradability [TIRADO *et al.* 2017]. Thus, there has been increasing interest in developing flocculants that are biodegradable and based on natural products. Some of these are: modified starch, cellulose, and bacterial polysaccharides [OLADOJA 2014].

In this sense, natural polymers of plant and animal origin are being developed in water treatment (clarification) to reduce the use of conventional flocculant coagulants. Natural coagulants of vegetable origin have been successfully evaluated in water clarification processes due to their ability to remove turbidity, colour, organic matter, colloidal particles, and microorganisms. Starches are polysaccharides present in plants, which are a source of high availability and low cost, and have many physicochemical properties like biocompatibility biodegradability, and non-toxicity [ARRIETA ALMARIO *et al.* 2019; YULIANA *et al.* 2012]. Several industrial applications have been found for starch such as pharmaceutical, food, biomedical, cosmetic and polymer [ARRIETA ALMARIO *et al.* 2019; RODRÍGUEZ-SOTO *et al.* 2019]. Currently, different investigators have found that starches can be used as flocculants due of their properties; thus could reduce cost involved in water treatment for discharges from food and beverages, mining, fermentation, dyes and textiles [SALEHIZADEH *et al.* 2018].

Natural coagulants of vegetable origin have been used from *Moringa oleifera* [RODINO-ARGUELLO *et al.* 2015], starch of *Manihot esculenta* [ORTIZ ALCOCER *et al.* 2018], and *Opuntia cactus* [FUENTES MOLINA *et al.* 2016], which turn out to be biodegradable, economic, safe for their compatibility with the environment; thanks to the presence of soluble proteins that acts in the process as a natural cationic cationic polyelectrolyte. The performance of the final application of starch as a coagulant and flocculant, depends to the structure and the molecular weight, in addition to environmental parameters [WU *et al.* 2016]. Then, it is important to effectively build and exploit the structure-activity relationships which influence the selection and design of high-performance flocculants in decontamination, since colloids in water are negatively charged and have a negative floc. Cationic flocculant is suitable for charge neutralisation and favourable for flocculation [OLADOJA 2015; WANG *et al.* 2013]. Nevertheless, little has been studied on the effects of polymeric flocculant chain architectures that impact process performance due to the long chain of macromolecules [WU *et al.* 2016]. Therefore, in the present study, yam starch (*Dioscorea rotundata*) was used as a clarifier of turbid waters, evaluating the effect of the coagulant dose, agitation speed and pH in the process.

MATERIAL AND METHODS

RAW MATERIAL

For the development of the present research a random experimental design of central point type by blocks was followed, developed by the software STATGRAPHICS Centurion XVIII. The effect of agitation speed (rpm) and coagulant concentration (ppm) on turbidity removal percentage and pH was evaluated. A Thomson WGZ 400B turbidimeter was used to quantify the

turbidity of the samples, a 900 Bante Instrument multiparameter to measure the pH of the solutions and a Lovibond PFX195 digital colorimeter to quantify the colour present in the samples. Bentonite, distilled water, NaOH and yam were used in the execution of the experiment.

STARCH EXTRACTION

Yam starch was extracted by two methods: NaOH and H₂O. To carry out these, a solution of NaOH 2.50% and H₂O, in a 1:2 weight-volume relation, was contacted with 500 g of yam previously prepared by peeling, washing, and grating. Later, the mixture was homogenised and left to cool for 24 h at 4°C. After that, they were liquefied, filtered to be centrifuged at 1500 rpm for 10 min; to the precipitate obtained in the centrifuge, 200 cm³ of deionised water were added, and the pH was adjusted to neutrality using HCl and NaOH 0.20 M. Then, the precipitate was centrifuged again at the same conditions, and dried for 24 h at room temperature, for subsequent milling.

JAR TESTS

Synthetic turbid water was prepared dissolving 0.30 g of bentonite in deionised water, mixing this solution for 1 h at 200 rpm. Afterwards, the solution was left for 21 h for a hydration process. Each solution was then diluted in 1.90 dm³, and mixed resulting in a turbid water of 32.30 NTU [CANEPA *et al.* 2004]. For the coagulation-flocculation tests, a jar test equipment was used, where the prepared turbid water solution was put in contact with the natural coagulant (yam starch).

Likewise, to compare the development of the natural coagulant, the prepared turbid water was put in contact with the synthetic coagulant Al₂(SO₄)₃, observing its effect on pH.

All test were made by triplicate.

STATISTICAL ANALYSIS

Statistical analysis was performed with the STATGRAPHICS Centurion XVIII program, where an analysis of variance (ANOVA) with a 95% confidence level (maximum permissible error 5%) was performed.

RESULTS AND DISCUSSION

STARCH YIELD

After following the starch extraction methodology with H₂O and NaOH, the initial 500 g of hawthorn yam 213 g of bagasse and 287 g of starch on a wet basis were obtained, reaching a yield of 42.60%. Subsequently, the starch was dried, obtaining 78.20 and 81.30 g of starch by extraction methods with NaOH and H₂O, respectively. Therefore, it can be said that the hydration method is more efficient to extract starch from yam.

Previously, it was reported the extraction of starch from different fonts with yields around 0.5% [CARRASQUERO *et al.* 2017], and 1.5% [HERNÁNDEZ-CARMONA *et al.* 2017] using the extraction with water. Therefore, the percentages of starch extracted are optimal since they exceed the percentages reported, with yam starch being the highest percentage with 16.26%.

pH EFFECT

It was found all the water samples reached a pH between 6 and 8 (Fig. 1), being within the range considered suitable for the use of raw water according to Colombian standard defined by Decree 1575 [2007]; comprising what was found by [SARITHA *et al.* 2017], who determined the same optimal pH range for the removal of turbidity through chitin as a natural coagulant. Likewise, the behaviour of the pH in relation to the coagulant dose and agitation rate during the jar test is inversely proportional to the concentration of the coagulant and the agitation rate does not clearly affect the pH of the samples. This behaviour could be explained for the fact that with an increase in pH, the zeta potential of the starches is more negatively charged by the presence of the carboxyl (COOH) and hydroxyl (OH) groups of the proteins [CHOY *et al.* 2016].

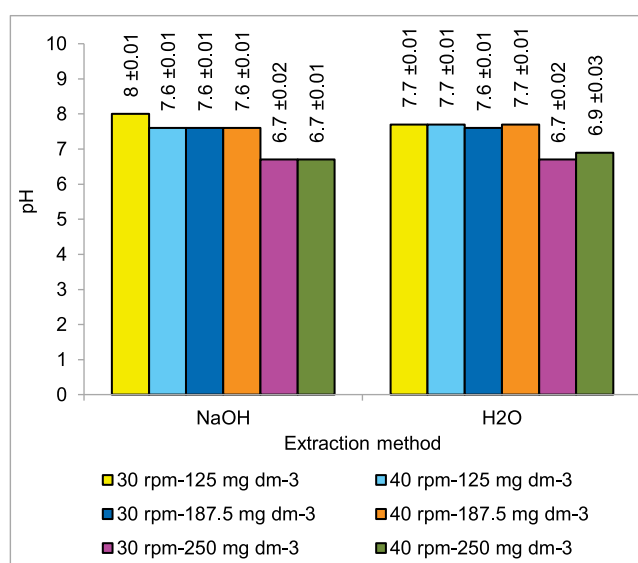


Fig. 1. pH as a function of speed and coagulant concentration of yam starches; source: own study

The pH can change the superficial charge of coagulants and pollutants; thus, it is a critical variable involve in coagulation-flocculation processes [KUKIĆ *et al.* 2015]. In this sense, it has been reported pH dependence when using acorn and nut of horse chestnut from common oak used like natural coagulants [ANTOV *et al.* 2018], the opposite happened with bean seed extracts [KUKIĆ *et al.* 2015], and plantain peel powder [DAVEREY *et al.* 2019]. This implies that the natural coagulants obtained in this investigation are highly stable over a wide pH range, which is an influential criteria for choosing a coagulants for its use in treatment of wastewater [PAREDES *et al.* 2018].

EVALUATION OF TURBIDITY AND COLOUR REDUCTION

The results of removal of colour and turbidity after the jar test show that all colour values are in the value of 10 cobalt-platinum, this indicates that they are in an acceptable range according to Decree 1575 of 2007 for potable waters (Tab. 1).

The Figure 2 shows the behaviour of turbidity in relation to the coagulant dose and the agitation speed during the jar test. It is observed that when the coagulant dose of 250 ppm is added, it is where the highest percentage of turbidity removal is achieved in

Table 1. Results of turbidity and colour removal tests using yam starches

Starch	Speed (rpm)	Colour removal (Pt-Cb)			Turbidity removal (NTU)		
		coagulant concentration (mg-dm ³)					
		125	187.5	250	125	187.5	250
NaOH	30	10	10	0	8.3	7.1	3.3
	40	10	10	0	5.8	4.0	2.4
H ₂ O	30	10	10	0	12.7	11.8	8.1
	40	10	10	0	9.0	8.9	5.8

Source: own study.

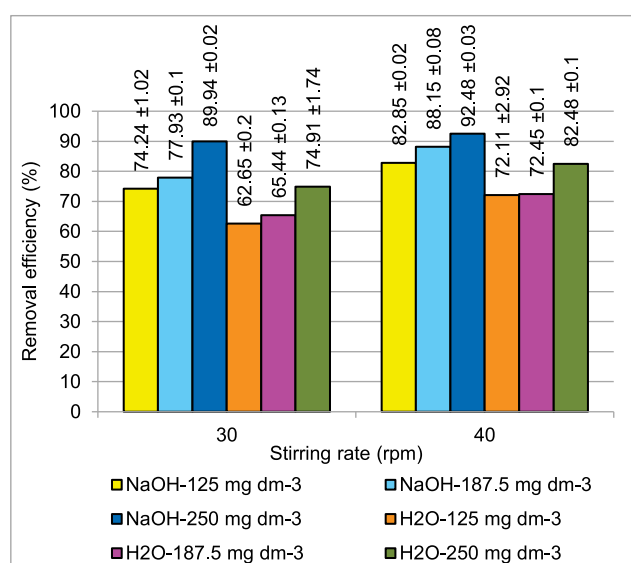


Fig. 2. Effect of the agitation speed (rpm), coagulant dose (ppm) and type of extraction on the percentage of turbidity removal; source: own study

comparison with the other coagulants and speeds at which the work was performed. In this same figure it is observed that the percentage of reduction of turbidity is directly proportional to the agitation speed and to the concentration of the coagulant, in the same way these affect in a notorious way the reduction in the process of coagulation-flocculation, coincide with what was reported by [DOS SANTOS *et al.* 2018], who observed in the coagulation/flocculation tests evaluated a rapid decrease in values of colour and turbidity of the starch effluent for the different concentrations evaluated.

STATISTICAL ANALYSIS

Table 2 shows the results obtained from the analysis of variance over the pH of the extracted yam starches to determine the effects of the tested factors, finding that the yam starch extracted with NaOH had a significant effect on the concentration ($p < 0.05$). On the other hand, cassava starch extracted with H₂O had no significant effect ($p > 0.05$) on the agitation speed or on the concentration of the coagulant. In the percentage of turbidity removal with starch extracted by the two methods tested NaOH and H₂O from yam, ANOVA results gave a p -value less than 0.05

Table 2. ANOVA for obtained yam starches

Parameter	NaOH			H ₂ O		
	sum of squares	F-value	p	sum of squares	F-value	p-value
A factor	0.045	0.39	0.578	0.020	0.17	0.705
B factor	1.265	10.83	0.046	0.893	7.55	0.071
Total error	0.350			0.354		
Error (corr.)	1.661			1.268		

Explanations: A = stirring rate, B = coagulant concentration.
Source: own study.

in both effects (agitation speed and coagulant concentration) in the two extraction methods which indicates that these effects had a significant influence on the removal of turbidity.

COMPARISON OF SYNTHESISED STARCH WITH A SYNTHETIC COAGULANT

The Figure 3 shows the results obtained from a pH measurement of raw water samples after a jug test using the synthetic coagulant Al₂(SO₄)₃. Comparing the results of Figures 1 and 3, it was found that the presented residual pH values of the natural coagulants extracted from yam are closer to the ranges stipulated by the current Colombian norm than those found with the synthetic coagulant, opposite case with that reported by ORTIZ ALCOCER *et al.* [2018], where the pH values were between 6.9–7.8, for the coagulant of cassava starch and synthetic coagulant Al₂(SO₄)₃.

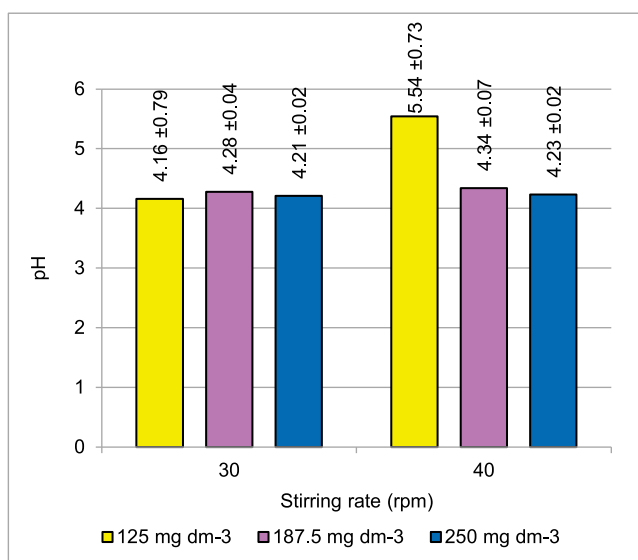


Fig. 3. Effect of coagulant concentration, type of extraction and speed of agitation on pH; source: own study

In the Table 3 are shown the results obtained from a colour measurement of raw water samples after a jar test using Al₂(SO₄)₃ as a synthetic coagulant. When comparing the results obtained for the synthetic coagulant with those of the natural coagulant (Tab. 1), the colour values for both the natural coagulants extracted from the yam and the synthetic coagulants had the same

Table 3. Removal of colour and turbidity using the commercial synthetic coagulant Al₂(SO₄)₃.

Speed (rpm)	Colour removal (Pt-Cb)			Turbidity removal (NTU)		
	coagulant concentration (mg·dm ⁻³)					
	125.0	187.5	250.0	125.0	187.5	250.0
30	10	10	10	3.5	3.9	2.5
40	10	10	10	2.2	2.3	2.5

Source: own study.

value. Likewise, the residual turbidity values obtained with the natural coagulants extracted from yam did not reach the minimum value required by the normative of Colombia, different from the data presented by MOLINA *et al.* [2016], who obtained the best turbidity values in natural coagulants as a substitute for Al₂(SO₄)₃. However, the results are satisfactory considering the conclusion of RODIÑO-ARGUELLO *et al.* [2015], which indicated that a complementary sedimentation and filtration process can be used as an alternative coagulation-flocculation water treatment system valid for small scale or rural areas. These results could be attached to the quickly formation of flocs with good characteristics, whose contributed to the appropriate sedimentation because of the consistency and weight of the particles; thus, according to the results obtained by PAREDES *et al.* [2018].

CONCLUSIONS

The obtaining of the coagulant in powder from yam using NaOH and H₂O was satisfactory, getting the best results of turbidity removal with the starch extracted by alkaline route, with a starch synthesis yield of 42.60% in wet base. The synthesised coagulant did not add odour, flavour, or colour to the raw water. Also, it was highlighted because the pH was maintained in the range of current Colombian regulations. It was found that using starch extracted with sodium hydroxide, agitation speed of 40 rpm, and coagulant concentration of 250 ppm, a removal percentage higher than 92% was reached. From the obtained results when using the natural coagulant respect Al₂(SO₄)₃, it could be said that a complementary sedimentation and filtration process can be used as an alternative coagulation-flocculation water treatment system valid for small-scale or rural areas. So the use of natural coagulant from yam can be recommended for use in the coagulation stage in raw water treatment process for subsequent potabilisation.

ACKNOWLEDGEMENTS

The authors thank the collaborators of the Universidad de Cartagena (Colombia) for the support in the development of this work regarding laboratory, software use, and time for their researchers.

REFERENCES

- ANTOV M.G., ŠCIBAN M.B., PROĐANOVIĆ J.M., KUKIĆ D.V., VASIĆ V.M., ĐORĐEVIĆ T.R., MILOŠEVIĆ M.M. 2018. Common oak (*Quercus robur*) acorn as a source of natural coagulants for water turbidity

- removal. *Industrial Crops and Products*. Vol. 117 p. 340–346. DOI 10.1016/j.indcrop.2018.03.022.
- ARRIETA ALMARIO A.A., MENDOZA-FANDEÑO J.M., ARRIETA-TORRES P.L. 2019. Evaluation of elaboration parameters of a solid biopolymer electrolyte of cassava starch on their performance in an electrochemical accumulator. *Revista Mexicana de Ingeniería Química*. Vol. 18(3) p. 1203–1210. DOI 10.24275/uam/izt/dcbi/revmexingquim/2019v18n3/Arrieta.
- CANEPA L., MALDONADO V., BARRENECHEA A., AURAZO M. 2004. Filtración. Capítulo 9. En: Tratamiento de agua para consumo humano. Plantas de filtración rápida. Manual I: Teoría [Filtration. Chapter 9. In: Treatment of water for human consumption. Rapid filtration plants. Manual I: Theory]. T. 2. Lima. CEPIS/OPS p. 83–100.
- CARRASQUERO S.J., MONTIEL FLORES S., FARÍA PERCHE E.D., PARRA FERRER P. M., MARIN LEAL J.C., DÍAZ MONTIEL A.R. 2017. Efectividad de coagulantes obtenidos de residuos de papa (*Solanum tuberosum*) y plátano (*Musa paradisiaca*) en la clarificación de aguas [Effectiveness of coagulants obtained from residues of potato (*Solanum tuberosum*) and banana (*Musa paradisiaca*) in water purification]. *Revista Facultad de Ciencias Básicas*. Vol. 13(2) p. 90–99. DOI 10.18359/RFCB.1941.
- CHOY S., PRASAD K.N., WU T.Y., RAGHUNANDAN M.E., RAMANAN R.N. 2016. Performance of conventional starches as natural coagulants for turbidity removal. *Ecological Engineering*. Vol. 94(1) p. 352–364. DOI 10.1016/j.ecoleng.2016.05.082.
- DAVEREY A., TIWARI N., DUTTA K. 2019. Utilization of extracts of *Musa paradisiaca* (banana) peels and *Dolichos lablab* (Indian bean) seeds as low-cost natural coagulants for turbidity removal from water. *Environmental Science and Pollution Research*. Vol. 26(33) p. 34177–34183. DOI 10.1007/s11356-018-3850-9.
- Decreto Número 1575 de 2007 Mayo 09 de 2007 Por el cual se establece el sistema para la protección y control de la calidad del agua para consumo humano [Decree Number 1575 of 2007 May 09 of 2007 By which the system for the protection and control of the quality of water for human consumption is established] [online]. [Access 15.02.2021]. Available at: <https://www.minambiente.gov.co/wp-content/uploads/2022/01/decreto-1575-de-2007.pdf>
- DOS SANTOS J.D., VEIT M.T., JUCHEN P.T., DA CUNHA GONÇALVES G., PALÁCIO S.M., FAGUNDES-KLEN M. 2018. Use of different coagulants for cassava processing wastewater treatment. *Journal of Environmental Chemical Engineering*. Vol. 6(2) p. 1821–1827. DOI 10.1016/j.jece.2018.02.039.
- FUENTES MOLINA N., MOLINA RODRIGUEZ E.J., ARIZA C.P. 2016. Coagulantes naturales en sistemas de flujo continuo, como sustituto del $Al_2(SO_4)_3$ para clarificación de aguas [Natural coagulants in continuous flow systems as a substitute of $Al_2(SO_4)_3$ for water clarification]. *Producción + Limpia*. Vol. 11. No. 2 p. 41–54. DOI 10.22507/pml.v11n2a4.
- HERNÁNDEZ-CARMONA F., MORALES-MATOS Y., LAMBIS-MIRANDA H., PASQUALINO J. 2017. Starch extraction potential from plantain peel wastes. *Journal of Environmental Chemical Engineering*. Vol. 5(5) p. 4980–4985. DOI 10.1016/J.JECE.2017.09.034.
- KAAVESSINA M., DISTANTINA S., FADILAH 2017. Synthesis of grafted flocculants based on several kinds of starch and its performance in water turbidity removal. MATEC Web of Conferences. Vol. 101, 01003. DOI 10.1051/mateconf/201710101003.
- KUKIĆ D.V., ŠCIBAN M.B., PRODANOVIĆ J.M., TEPIĆ A.N., VASIĆ M.A. 2015. Extracts of fava bean (*Vicia faba* L.) seeds as natural coagulants. *Ecological Engineering*. Vol. 84 p. 229–232. DOI 10.1016/j.ecoleng.2015.09.008.
- OLADOJA N.A. 2014. Appraisal of cassava starch as coagulant aid in the alum coagulation of Congo red from aqua system. *International Journal of Environmental Pollution and Solutions*. Vol. 2(1) p. 47–58.
- OLADOJA N.A. 2015. Headway on natural polymeric coagulants in water and wastewater treatment operations. *Journal of Water Process Engineering*. Vol. 6 p. 174–192. DOI 10.1016/j.jwpe.2015.04.004.
- ORTIZ ALCOCER V., LÓPEZ OCAÑA G., TORRES BALCAZAR C.A., PAMPILLÓN GONZÁLEZ L. 2018. Almidón de yuca (*Manihot esculenta* Crantz) como coadyuvante en la coagulación floculación de aguas residuales domésticas [Cassava starch (*Manihot esculenta* Crantz) as a coadjuvant in the coagulation flocculation of domestic wastewater]. *CIBA Revista Iberoamericana de Las Ciencias Biológicas y Agropecuarias*. Vol. 7(13) p. 18–46. DOI 10.23913/ciba.v7i13.73.
- PAREDES C.M.D., CARRANZA M.M.H., ALBORNOZ J.I.F., SALAZAR R.A.P., JAMANCA N.F.A. 2018. Efectividad de especies naturales como ayudantes de coagulación, para la clarificación de aguas turbias en épocas de avenidas en caseríos y centros poblados de Huaraz y Callejón de Huaylas [Effectiveness of natural species coagulation as assistants for clarification of turbid water in times of flood in villages and towns of Huaraz and Callejón de Huaylas]. *Aporte Santiaguino*. Vol. 11(2) p. 299–310. DOI 10.32911/as.2018.v11.n2.583.
- RODINO-ARGUELLO J.P., FERÍA-DÍAZ J.J., PATERNINA-URIBE R. DE J., MARRUGO-NEGRETTE J.L. 2015. Tratamiento de agua cruda del Río Sinú con extractos coagulantes naturales [Sinú River raw water treatment by natural coagulants]. *Revista Facultad de Ingeniería Universidad de Antioquia*. Vol. 76 p. 90–98. DOI 10.17533/udea.redin.n76a11.
- RODRÍGUEZ-SOTO K.X., PIÑEROS-CASTRO N.Y., ORTEGA-TORO R. 2019. Laminated composites reinforced with chemically modified sheets-stalk of *Musa cavendish*. *Revista Mexicana de Ingeniería Química*. Vol. 8(3) p. 749–758. DOI 10.24275/uam/izt/dcbi/revmexingquim/2019v18n2/RodriguezS.
- SALEHIZADEH H., YAN N., FARNOOD R. 2018. Recent advances in polysaccharide bio-based flocculants. *Biotechnology Advances*. Vol. 36(1) p. 92–119. DOI 10.1016/j.biotechadv.2017.10.002.
- SARITHA V., SRINIVAS N., SRIKANTH VUPPALA N.V. 2017. Analysis and optimization of coagulation and flocculation process. *Applied Water Science*. Vol. 7(1) p. 451–460. DOI 10.1007/s13201-014-0262-y.
- SOHRABI Y., RAHIMI S., NAFEZ A.H., MIRZAEI N., BAGHERI A., GHADIRI S.K., REZAEI S., CHARGANEH S.S. 2018. Chemical coagulation efficiency in removal of water turbidity. *International Journal of Pharmaceutical Research*. Vol. 10(3) p. 188–194. DOI 10.31838/ijpr/2018.10.03.071.
- TEH C.Y., BUDIMAN P.M., SHAK K.P.Y., WU T.Y. 2016. Recent advancement of coagulation–flocculation and its application in wastewater treatment. *Industrial & Engineering Chemistry Research*. Vol. 55(16) p. 4363–4389. DOI 10.1021/acs.iecr.5b04703.
- TIRADO D.F., HERRERA A.P., ACEVEDO CORREA D. 2017. Evaluation of the coagulant capacity of starch obtained from topocho pelipita plantain clone (*Musa ABB*) for turbidity and color removal in raw waters. *Revista Internacional de Contaminación Ambiental*. Vol. 33 p. 125–134. DOI 10.20937/RICA.2017.33.esp01.11.
- TRUJILLO D., DUQUE L.F., ARCILA J.S., RINCÓN A., PACHECO S., HERRERA O. F. 2014. Remoción de turbiedad en agua de una fuente natural mediante coagulación/floculación usando almidón de plátano [Turbidity removal in a water sample from a natural source via

- coagulation/flocculation using plantain starch]. *Revista ION*. Vol. 27(1) p. 17–34.
- WAN KAMAR W.I.S., ABDUL AZIZ H., RAMLI S. F. 2015. Removal of suspended solids, chemical oxygen demand and color from domestic wastewater using sago starch as coagulant. *Applied Mechanics and Materials*. Vol. 802 p. 519–524. DOI [10.4028/www.scientific.net/AMM.802.519](https://doi.org/10.4028/www.scientific.net/AMM.802.519).
- WANG J., YUAN S., WANG Y., YU H. 2013. Synthesis, characterization and application of a novel starch-based flocculant with high flocculation and dewatering properties. *Water Research*. Vol. 47(8) p. 2643–2648. DOI [10.1016/j.watres.2013.01.050](https://doi.org/10.1016/j.watres.2013.01.050).
- WU H., LIU Z., YANG H., LI A. 2016. Evaluation of chain architectures and charge properties of various starch-based flocculants for flocculation of humic acid from water. *Water Research*. Vol. 96 p. 126–135. DOI [10.1016/j.watres.2016.03.055](https://doi.org/10.1016/j.watres.2016.03.055).
- YULIANA M., HUYNH L.-H., HO Q.-P., TRUONG C.-T., JU Y.-H. 2012. Defatted cashew nut shell starch as renewable polymeric material: Isolation and characterization. *Carbohydrate Polymers*. Vol. 87 (4) p. 2576–2581. DOI [10.1016/j.carbpol.2011.11.044](https://doi.org/10.1016/j.carbpol.2011.11.044).